

# HP Series

## industrial low pressure NF elements

The HP membrane is characterized by an approximate molecular weight cut-off of 100-200 Dalton for uncharged organic molecules. This membrane delivers a high permeate flux and features a high retention for salts including nitrate as well as for organics compounds.


The HP membrane element is designed to operate at low pressure for a variety of applications including partial softening of water in municipal and industrial markets.

**Table 1: Element Specification**


Membrane	Thin-film membrane (TFM*)		
Model	Test Salt	Average permeate flow gpd (m <sup>3</sup> /day)	Stabilized rejection
HP4040F30	NaCl	2,400 (9.1) (1)	85-95% (1)
	MgSO <sub>4</sub>	2,800 (10.6) (2)	>98% (2)
HP8040F30	NaCl	11,000 (41.6) (1)	85-95% (1)
	MgSO <sub>4</sub>	13,000 (49.2) (2)	>98% (2)

After 24 hours operation, individual flow rate may vary ±25%.  
 (1) 500ppm NaCl feed solution, 75 psi operating pressure, 77°F (25°C), pH7 and 15% permeate recovery.  
 (2) 2000 ppm MgSO<sub>4</sub> feed solution, 100 psi operating pressure, 77°F (25°C), pH7 and 15% permeate recovery.

Model	Active area ft <sup>2</sup> (m <sup>2</sup> )	Outer wrap	Part number
HP4040F30	80 (7.4)	Fiberglass	3151070
HP8040F30	400 (37.1)	Fiberglass	3149763

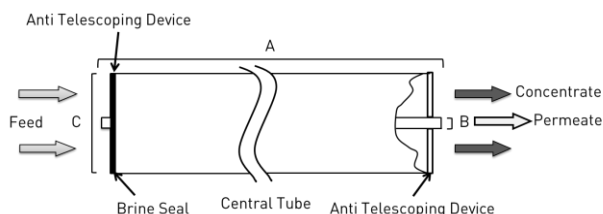

**Figure 1a: Element Dimensions Diagram - Male**

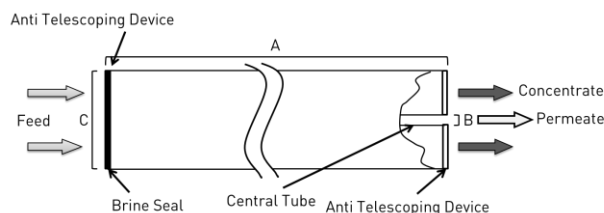

**Figure 1b: Element Dimensions Diagram - Female**

**Table 2: Operating and CIP parameters**

<b>Typical Operating Pressure</b>	70 psi (483 kPa gage)
<b>Typical Operating Flux</b>	10-20GFD (17-34LMH)
<b>Maximum Operating Pressure</b>	600psi (4,137kPa)
<b>Maximum Temperature</b>	Continuous operation: 122°F (50°C) Clean-In-Place (CIP): 122°F (50°C)
<b>pH range</b>	Continuous operation 3.0 – 9.0 Clean-In-Place (CIP): 2.0 – 11.0 (1)
<b>Maximum Pressure Drop</b>	Over an element: 12 psi (83 kPa) Per housing: 50 psi (345 kPa)
<b>Chlorine Tolerance</b>	500+ ppm-hours, dechlorination recommended
<b>Feedwater</b>	NTU <1 SDI <sub>15</sub> < 5

(1) Refer to Cleaning Guidelines Technical Bulletin TB1194.

**Table 3: Dimensions and Weights**

Model	Fig.	Dimensions, inches (cm)			Boxed Weight lbs (kg)
		A	B	C	
HP4040F30	1a	40.0 (101.6)	0.75 (1.90)	3.9 (9.9)	11 (5)
HP8040F30	1b	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)

Find a contact near you by visiting [www.suezwatertechnologies.com](http://www.suezwatertechnologies.com) and clicking on "Contact Us."

\*Trademark of SUEZ; may be registered in one or more countries.

©2018 SUEZ. All rights reserved.